

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 10-081895

(43)Date of publication of application : 31.03.1998

(51)Int.Cl. C11D 3/395
B65D 47/06
C11D 17/04
C11D 17/08
// B65D 47/20

(21)Application number : 08-235664 (71)Applicant : LION CORP


(22)Date of filing : 05.09.1996 (72)Inventor : IWAO SHUJI

(54) BLEACHING DETERGENT PRODUCT

(57)Abstract:

PROBLEM TO BE SOLVED: To obtain a bleaching detergent product contained in a squeezable foam container which can deliver a foamed material suitable for bleaching and cleaning by squeezing the body part of the container with the hand.

SOLUTION: A liquid composition A containing 0.5-10wt.% bleaching agent and 1-50wt.% surface active agent is filled into a squeezable foam container 2 which has a mixing chamber 32 for mixing the composition A sent from the inside of the container body 10 through a liquid transport tube 21 when the body part 12 is squeezed with air B, a meshed member 33 for forming a foamed material C by allowing the mixture obtained in the chamber 32 to pass therethrough to cause foaming, and a spout 22 for delivering the foamed material C. The meshed member 33 has a mesh size of 100-600 μ m.

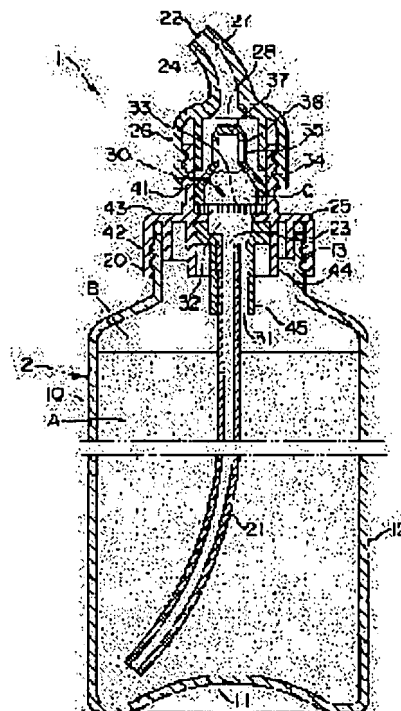

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Abstract of JP10081895

PROBLEM TO BE SOLVED: To obtain a bleaching detergent product contained in a squeezable foam container which can deliver a foamed material suitable for bleaching and cleaning by squeezing the body part of the container with the hand.

SOLUTION: A liquid composition A containing 0.5-10wt.% bleaching agent and 1-50wt.% surface active agent is filled into a squeezable foam container 2 which has a mixing chamber 32 for mixing the composition A sent from the inside of the container body 10 through a liquid transport tube 21 when the body part 12 is squeezed with air B, a meshed member 33 for forming a foamed material C by allowing the mixture obtained in the chamber 32 to pass therethrough to cause foaming, and a spout 22 for delivering the foamed material C. The meshed member 33 has a mesh size of 100-600 μ m.

